


SCREWED BRASSWARE

Hose Barb MI

Product Specifications

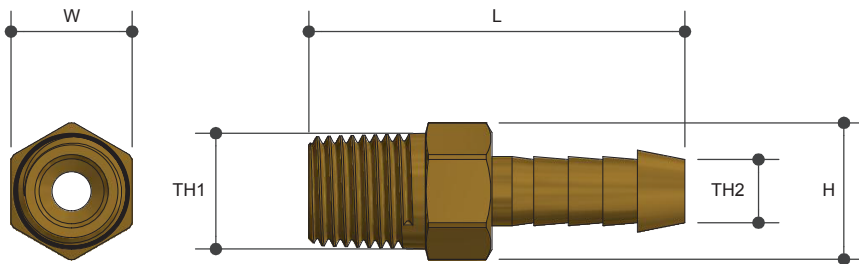

Specifications

Maximum working temperature 1°C to 60°C

Maximum pressure rating 1600kPa

Features

Watermark approved

DR Brass

Tested and certified to AS 3688

Sizing Chart (MM)

	L	H	W	TH1	TH2
B0606	40	16	14	R 1/4"	6MM
B0608	44	16	14	R 1/4"	8MM
B0610	42	16	14	R 1/4"	10MM
B0615	45	16	14	R 1/4"	15MM
B1006	44	20	17	R 3/8"	6MM
B1010	43	20	17	R 3/8"	10MM
B1015	48	20	17	R 3/8"	15MM
B1510	48	25	22	R 1/2"	10MM
B1515	51	25	22	R 1/2"	15MM
B1520	58	25	22	R 1/2"	20MM
B2015	49	32	28	R 3/4"	15MM
B2020	60	31	27	R 3/4"	20MM
B2025	67	33	29	R 3/4"	25MM
B2520	64	39	34	R 3/4"	20MM
B2525	69	38	34	R 1"	25MM
B2532	71	39	34	R 1"	32MM
B3232	71	50	44	R 1 1/4"	32MM
B4040	73	53	49	R 1 1/2"	40MM
B5050	95	65	61	R 2"	50MM
B6565	97	81	76	R 2 1/2"	65MM
B8080	122	96	89	R 3"	80MM
B100100	133	124	117	R 4"	100MM

Material Chart

Part	Material
Nipple	DR Brass
Hose Barb	DR Brass

For more information on Metforge, contact:

Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430

F. 1300 780 441

E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Metforge are registered trade mark belonging to Austworld Pty Ltd.

