


# ISOLATION / NON RETURN VALVE

Female

Product Specifications

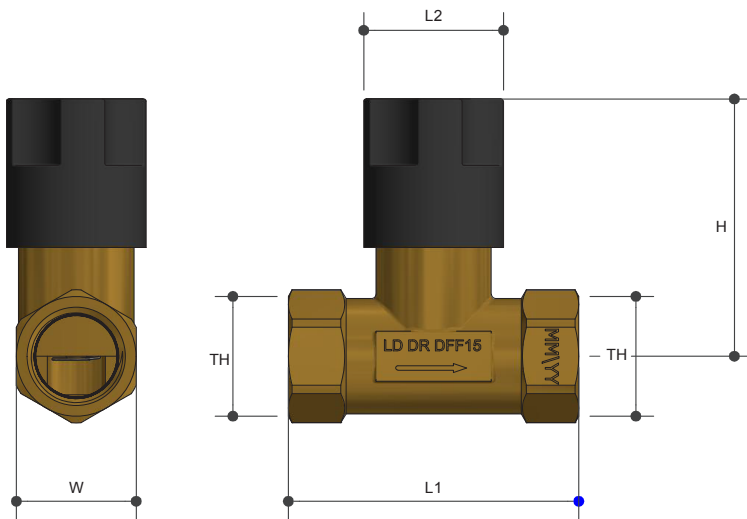

## Features

Watermark approved

100% pressure tested

Integral non return and isolation function

Suitable for horizontal and vertical installation

## Specifications

Working temperature -15°C to 90°C

Maximum pressure rating 1600 KPa

## Sizing Chart (MM)

	L1	L2	H	W	TH
DFF15	66	32	58	28	Rp 1/2"

## Material Chart

Part	Material
Body	DR Brass
Nut	DR Brass
Handle	ABS
Bonnet	DR Brass
O Ring	Rubber
Spindle	DR Brass
Screw	Stainless Steel
Spring	Stainless Steel

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

