


FERRULES

Standard

Product Specifications

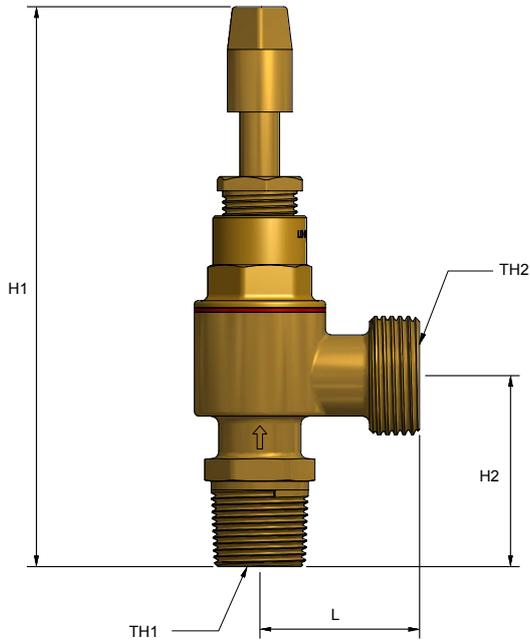

Specifications

Working temperature -20°C to 120°C

Max. pressure rating 2500kPa

Sizing Chart [MM]

	L	H1	H2	TH1	TH2
FE20M	45	157	54	Rp 3/4"	G 1"



Features

Watermark approved

DR Brass

100% pressure tested

WSAA Appraised

Tested and certified to AS 3718

Material Chart

Part	Material
Seal	EPDM
Nut	DR Brass
Body	DZR Brass
Handle	Brass
Bonnet	DZR Brass
Washer	Stainless Steel
Washer	EPDM
Washer	Fibre
Stem	Brass

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.

Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

