
DUAL APPROVED BALL VALVE

Stainless Steel 2 Piece Butterfly Handle FI X FI



Product Specifications

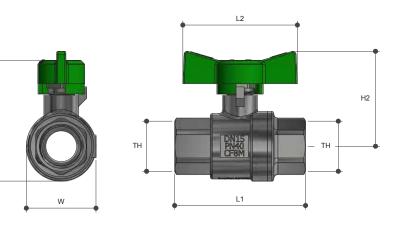

Specifications

H1

Working temperature -20°C to 120°C

Maximum pressure rating 4000kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
SSWB15F	64	56	59	46	34	Rp 1/2"
SSWB20F	71	56	66	50	42	Rp 3/4"
SSWB25F	83	56	77	56	51	Rp 1"



Features

Watermark approved			
Full bore			
100% pressure tested			
Available in sizes 15mm (1/2") to 25mm (1")			
Blow proof spindle			
Stainless steel handle, balls, nut			
Tested and certified to SPEC012 and AS4617			

Material Chart

Part	Material		
Body	CF8M		
Seal	PTFE		
Ball	Stainless Steel		
Bonnet	CF8M		
Handle	Stainless Steel		
Lock Nut	Stainless Steel		
Spindle	Stainless Steel		

For more information on Logi Valve, contact: Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

Austworld 15 Activity Clescent, Molendinal, Queensiana 4214 Australia

P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au



Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.