


# WATER SERVICE BALL VALVES

Inline FI X FI Lockable

Product Specifications

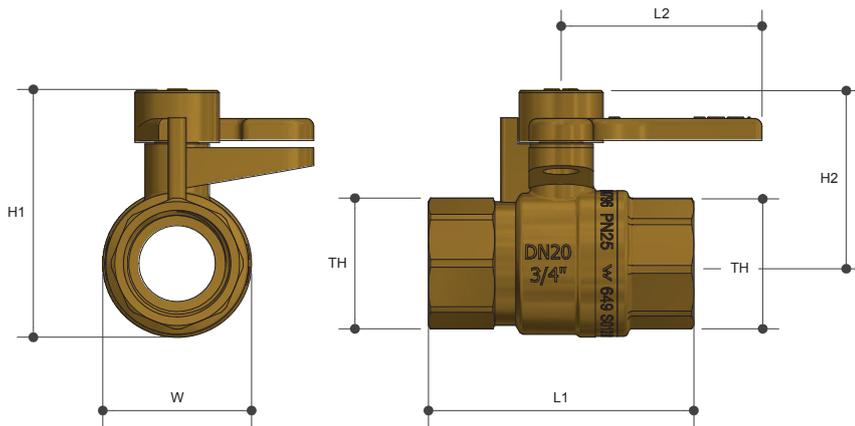

## Specifications

Working temperature 1 °C to 90 °C

Max. pressure rating 2500kPa

## Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
WB20FBL	66	50	62	45	37	Rp 3/4"
WB25FBL	81	56	73	50	46	Rp 1"



## Features

Watermark approved

DR Brass

Full Bore

100% pressure tested

Lockable ON and OFF

Tested and certified to AS 4796

## Material Chart

Part	Material
Seal	PTFE
Nut	Stainless Steel
Body	DR Brass
Handle	DR Brass
Ball	Stainless Steel
Cap	DR Brass
O Ring	FKM
Spindle	DR Brass

For more information on Logi Civil, contact:  
 Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
 P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.  
 Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

