


# WATERMARKED BALL VALVE

Pressfit CU X MI Low Lead Lever Handle

## Product Specifications

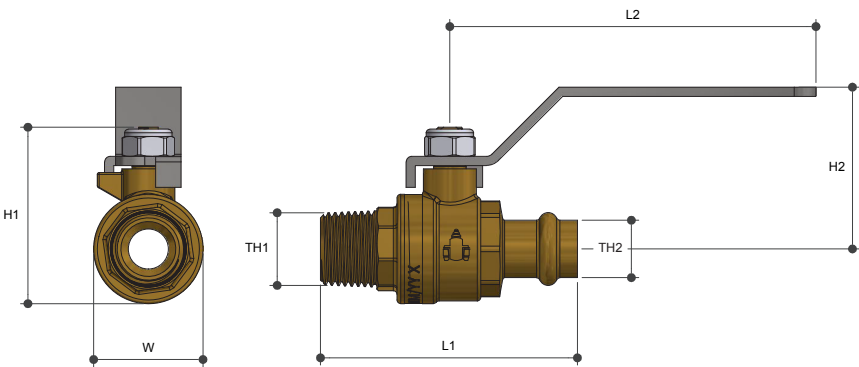

### Specifications

Working temperature 1 °C to 95 °C

Maximum pressure rating 2500kPa

### Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WP20MLL	80	101	55	48	37	R 3/4"	DN20
WP25MLL	95	101	64	52	46	R 1"	DN25

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430 F. 1300 780 441 E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.



### Features

Watermark approved

Full bore

Available in sizes 20mm (3/4") to 25mm (1")

100% pressure tested

Blow proof spindle

For use with Viega, Rothenberger, Novopress, Kempress, Rems & V-Profile Tools only

Tested and certified to WMTS012

### Material Chart

Part	Material
Body	DR Brass
Seal	PTFE
Ball	DR Brass
Lock Nut	Stainless Steel
Spindle	DR Brass
Bonnet	DR Brass
O Ring	FKM
Handle	Stainless Steel

