


NON RETURN VALVE

Spring Check Valve Watermarked

Product Specifications

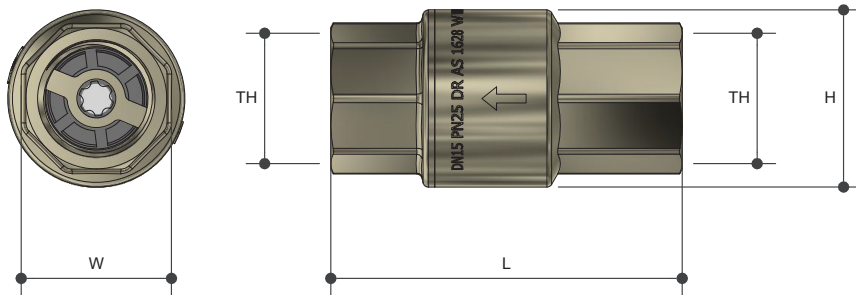

Specifications

Working temperature 1°C to 130°C


Maximum pressure rating 2000kPa

Maximum back pressure 1500kPa

Sizing Chart [MM]

	L	H	W	TH
WSP32	83	59	47	Rp 1 1/4"
WSP40	84	69	54	Rp 1 1/2"
WSP50	96	86	67	Rp 2"

Pressure and Loss

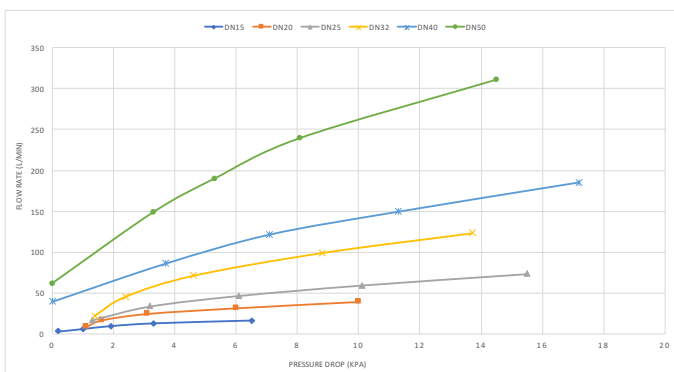

For more information on Logi Valve, contact:
 Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
 P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.



Features

Watermark approved

DR Brass

Suitable for vertical and horizontal installations

High flow design with minimal head loss

Tested and certified to AS 1628

Benefits

A versatile spring check valve that can be used on potable water applications and solar water.

Material Chart

Part	Material
Washer	EPDM
Stem	DR Brass
Body	DR Brass
Cap	DR Brass
Spring	Stainless Steel
Seals	FKM

